

11 FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE PHASE 期數的住宅物業的樓面平面圖

GLOSSARY 詞彙表

ACCESS DOOR = 檢修門

ACCESS DOOR AT 8/F, 12/F, 18/F AND 22/F = 檢修門於8樓、12樓、18樓及22樓

ACCESS DOOR AT 8/F AND 22/F = 檢修門於8樓及22樓

ACCESS DOOR AT 22/F = 檢修門於22樓

A/C = Air-conditioner = 冷氣機

A/C GRILLE = Air-conditioner Grille = 冷氣機護柵裝飾

A.C.P. = Air-conditioner Platform = 冷氣機平台

ACOUSTIC WINDOW (BAFFLE TYPE) AT 3/F TO 6/F = 減音窗(擋音式)設於3樓至6樓

A.D. FOR P.W. = Air Duct for Pipe Well = 管井的風槽

A.F. = Architectual Feature = 建築裝飾

ARCH. FEATURE ABOVE = Architectual Feature Above = 上層建築裝飾

ALUM. CLAD. = Aluminium Cladding = 鋁質蓋板

ALUM. CLAD. AT L/L & H/L = Aluminium Cladding at Low Level and High Level = 鋁質蓋板於低位及高位

A.R.D. = Air Release Duct = 減壓風喉槽

BATH = Bathroom = 浴室

BAL = Balcony = 露台

BAL & U.P. ABOVE = Balcony and Utility Platform Above = 上層露台及工作平台

B.R.1 = Bedroom 1 = 睡房1

B.R.2 = Bedroom 2 = 睡房2

COMMON FLAT ROOF = 公用平台

COMMON ROOF = 公用天台

COMMON ROOF (REFUGE FLOOR) = 公用天台(庇護層)

COVERED WALKWAY = 有蓋人行道

DN = Down = 落

DOG HOUSE = 機電箱

E.A.D. = Exhaust Air Duct = 排風管

E.L.V. = Extra Low Voltage = 特低壓電線

ELECT. RM. = Electric Room = 電線房

E.M.C. = Electric Meter Cabinet = 電錶箱

E.M.R. = Electric Meter Room = 電錶房

FAN RM.2A = Fan Room 2A = 風機房2A

FAN RM.2A (RSMRR) = Fan Room 2A (Refuse Storage and Material Recovery Room) = 風機房2A(垃圾及物料回收房)

F.H. = FH = Fire Hydrant = 消防栓

FLUSHING WATER TANK = 沖廁水水缸

FLUSHING WATER PUMP RM.2A = Flushing Water Pump Room 2A = 沖廁水水缸房2A

GLASS CLADDING = 玻璃蓋板

HORIZONTAL A.F. = Horizontal Architectural Feature = 橫向建築裝飾

HORIZONTAL A.F. AT 2/F TO 15/F = Horizontal Architectural Feature at 2/F to 15/F = 橫向建築裝飾設於2樓至15樓

HORIZONTAL A.F. AT 2/F TO 17/F = Horizontal Architectural Feature at 2/F to 17/F = 橫向建築裝飾設於2樓至17樓

HORIZONTAL A.F. AT 7/F TO 25/F = Horizontal Architectural Feature at 7/F to 25/F = 橫向建築裝飾設於7樓至25樓

HORIZONTAL A.F. AT 9/F TO 25/F = Horizontal Architectural Feature at 9/F to 25/F = 橫向建築裝飾設於9樓至25樓

HORIZONTAL A.F. AT 9/F TO 27/F = Horizontal Architectural Feature at 9/F to 27/F = 橫向建築裝飾設於9樓至27樓

HORIZONTAL A.F. AT 16/F TO 29/F = Horizontal Architectural Feature at 16/F to 29/F = 橫向建築裝飾設於16樓至29樓

HORIZONTAL A.F. AT 21/F TO 29/F = Horizontal Architectural Feature at 21/F to 29/F = 橫向建築裝飾設於21樓至29樓

HORIZONTAL A.F. AT 21/F TO 35/F & H/L OF 35/F = Horizontal Architectural Feature at 21/F to 35/F and High Level of 35/F = 橫向建築裝飾設於21樓至35樓及35樓的高位

H.R. = HR = Hose Reel = 消防喉轆

KIT = Kitchen = 廚房

LAV = Lavatory = 洗手間

LIV / DIN = Living and Dinning Room = 客飯廳

LIFT = 升降機

LIFT LOBBY = 升降機大堂

LIFT OVERRUN = 升降機槽頂部

M.BATH = Master Bathroom = 主人浴室

M.B.R. = Master Bedroom = 主人睡房

O.KIT = Open Kitchen = 開放式廚房

PRIVATE FLAT ROOF = 私人平台

PRIVATE FLAT ROOF OF T2B-FLAT H = 第2B座H單位之私人平台

PRIVATE FLAT ROOF OF T2C-FLAT D = 第2C座D單位之私人平台

PRIVATE ROOF (FOR TOWER 2A 35/F FLAT A) = 第2A座35樓A單位之私人天台

PRIVATE ROOF (FOR TOWER 2B 35/F FLAT A) = 第2B座35樓A單位之私人天台

POTABLE WATER TANK = 食水泵水缸

POTABLE WATER PUMP RM.2A = Potable Water Pump Room 2A = 食水泵水缸房2A

POTABLE WATER PUMP RM.2B = Potable Water Pump Room 2B = 食水泵水缸房2B

P.W. = PIPE WELL = 管井

P.D. = Pipe Duct = 管道槽

P.D.(FS) = Pipe Duct (Fire Service) = 管道槽(消防)

R.S.M.R.R. = Refuse Storage and Material Recovery Room = 垃圾及物料回收房

STO = Store = 儲物室

TRANSFER PLATE = 轉換層

TOP OF BAL & U.P. = Top of Balcony and Utility Platform and Air-conditioner Platform = 露台及工作平台及冷氣機平台頂部

TOWER 2A = 第2A座

TOWER 2B = 第2B座

TOWER 2C = 第2C座

U.P. = Utility Platform = 工作平台

UP = 上

VOID = 中空

UTI = Utility = 工作間

W.M.C. = Water Meter Cabinet = 水錶箱



FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE PHASE 期數的住宅物業的樓面平面圖

11

Remarks applicable to the floor plans of this section:

1. The dimensions of the floors plans are all structural dimensions in millimetres.
2. Balcony, Utility Platform and Air-conditioner Platform are Non-enclosed Areas.
3. There may be architectural features and/or exposed pipes on external walls of some of the floors. For details, please refer to the latest approved general building plans and other relevant plans.
4. Common drain pipes enclosed in cladding are located adjacent to Balcony, Utility Platform and Air-conditioner Platform of some residential properties.
5. There may be conduits for air-conditioning, other conduits and/or Mechanical & Electrical services concealed by ceiling bulkheads or false ceilings in a residential property.
6. There are non-structural prefabricated external walls in the residential properties. The Saleable Area as defined in the formal agreement for sale and purchase of a residential property has included the non-structural prefabricated external walls and is measured from the exterior of such non-structural prefabricated external walls.
7. The indications of fittings such as sinks, toilet bowls, bathtubs, wash basins etc. show on the floor plan are indications of their approximate locations only and not indications of their actual size, designs and shapes.

適用於本節各樓面平面圖之備註：

1. 樓面平面圖之尺寸所列數字為以毫米標示之建築結構尺寸。
2. 露台、工作平台及冷氣機平台為不可封閉之地方。
3. 部份樓層外牆範圍設有建築裝飾及/或外露喉管，詳細資料請參考最後批准之總建築圖則及其他相關圖則。
4. 部份住宅物業的露台、工作平台及冷氣機平台側外牆裝飾板內藏公用去水渠。
5. 住宅物業內裝飾橫樑或假天花內可能藏有冷氣喉管、其他喉管及/或機電設備。
6. 單位有非結構預製外牆。買賣合約之實用面積之計算包括非結構預製外牆，並由非結構預製外牆之外圍起計。
7. 平面圖所示之裝置如洗滌盤、坐廁、浴缸、面盆等只供展示其大約位置而非展示實際大小、設計及形狀。

11

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE PHASE
期數的住宅物業的樓面平面圖



	Tower 座數	Floor 樓層	Flat 單位												
			A	B	C	D	E	F	G	H	J	K	L	M	N
The thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板 (不包括灰泥) 的厚度(毫米)	Tower 2A 第2A座	1/F 1樓	125, 150	125, 150, 175	125, 150	125, 150	125, 150	125, 150	125, 150	125, 150	125, 150	125, 150	125, 150	125, 150	125, 150
The floor-to-floor height (refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor) of each residential property (mm) 每個住宅物業的層與層之間的高度 (指該樓層之石屎地台面與上一層 石屎地台面之高度距離)(毫米)			3350*, 3400*, 3450*, 3650*, 3700*, 3750*	3350*, 3400*, 3450*, 3500*, 3700*, 3750*	3400*, 3450*, 3700*, 3750*	3400*, 3450*, 3700*, 3750*	3400*, 3450*, 3700*, 3750*	3400*, 3500*, 3700*, 3750*	3400*, 3450*, 3700*, 3750*	3400*, 3450*, 3700*, 3750*	3400*, 3450*, 3700*, 3750*	3400*, 3450*, 3700*, 3750*	3400*, 3500*, 3700*, 3750*	3350*, 3400*, 3450*, 3750*	3400*, 3450*, 3700*, 3750*

* Inclusive of the thickness of filling on sunken slab.

* 包括跌級樓板上之填充層厚度。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Note: This statement required in Section 10(2)(e) in Part 1 of Schedule 1 of the Residential Properties (First-hand Sales) Ordinance (Cap.621) is not applicable to the Phase)

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。(註：此乃根據《一手住宅物業銷售條例》(第621章)附表1第1部第10(2)(e)條所規定的陳述並不適用於期數)




TOWER 第2A座

1/F Floor Plan 樓平面圖

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE PHASE 期數的住宅物業的樓面平面圖

11

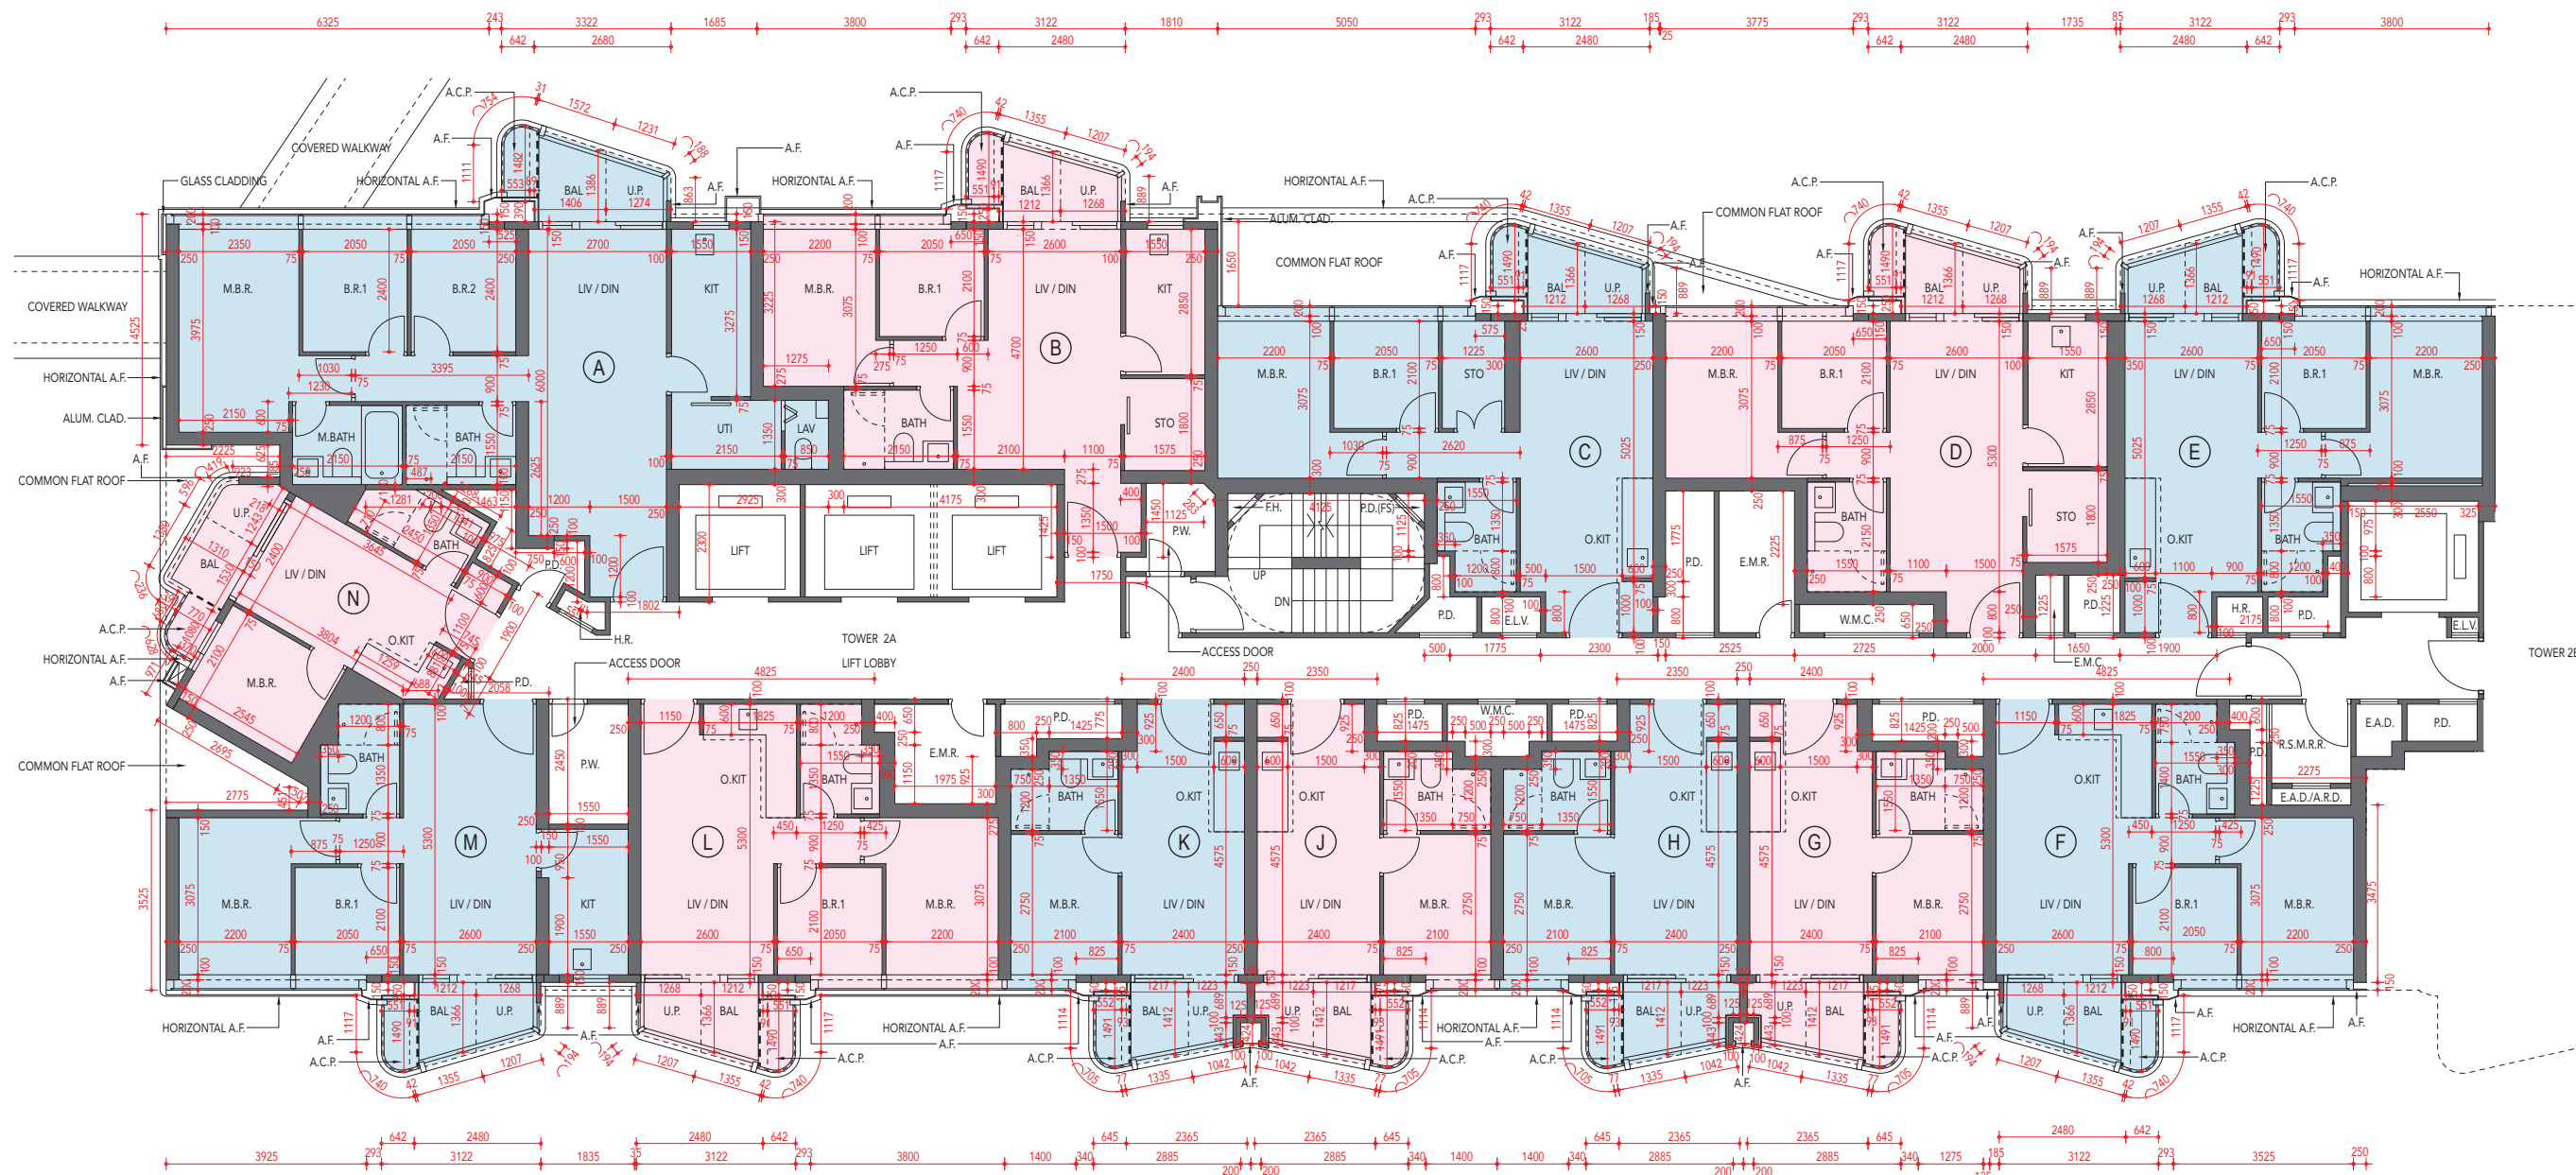

Scale 比例
0 5m/米

11

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE PHASE
期數的住宅物業的樓面平面圖



	Tower 座數	Floor 樓層	Flat 單位												
			A	B	C	D	E	F	G	H	J	K	L	M	N
The thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板 (不包括灰泥) 的厚度(毫米)	Tower 2A 第2A座	2/F - 31/F 2樓至31樓	125, 150	125, 150, 175	125, 150	125, 150	125, 150	125, 150	125, 150	125, 150	125, 150	125, 150	125, 150	125, 150	125, 150
		32/F - 33/F 32樓至33樓	125, 150	125, 150, 175	125, 150	125, 150	125, 150	125, 150	125, 150	125, 150	125, 150	125, 150	125, 150	125, 150	125, 150
		35/F 35樓	125, 150	125, 150, 200	125, 150	125, 150	125, 150	125, 150	125, 150	125, 150	125, 150	125, 150	125, 150	125, 150	125, 150
2/F - 31/F 2樓至31樓		3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*
32/F - 33/F 32樓至33樓		3500, 3500*	3500, 3500*	3500, 3500*	3500, 3500*	3500, 3500*	3500, 3500*	3500, 3500*	3500, 3500*	3500, 3500*	3500, 3500*	3500, 3500*	3500, 3500*	3500, 3500*	3500, 3500*
35/F 35樓		4000, 4050*, 4100*, 4300*, 4350*, 4400*	4000, 4050*, 4250*, 4300*, 4350*, 4400*	4000, 4050*, 4300*, 4350*	4000, 4050*, 4300*, 4350*	4000, 4050*, 4300*, 4350*	4000, 4050*, 4250*, 4350*	4000, 4050*, 4250*, 4350*	4000, 4050*, 4300*, 4350*	4000, 4050*, 4300*, 4350*	4000, 4050*, 4300*, 4350*	4000, 4050*, 4300*, 4350*	4000, 4050*, 4250*, 4350*	4000, 4300*, 4350*, 4400*	4000, 4050*, 4300*, 4350*

* Inclusive of the thickness of filling on sunken slab.

* 包括跌級樓板上之填充層厚度。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Note: This statement required in Section 10(2)(e) in Part 1 of Schedule 1 of the Residential Properties (First-hand Sales) Ordinance (Cap.621) is not applicable to the Phase)

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。(註：此乃根據《一手住宅物業銷售條例》(第621章)附表1第1部第10(2)(e)條所規定的陳述並不適用於期數)

Note:
4/F, 13/F, 14/F, 24/F and 34/F are omitted.

註：
不設4樓、13樓、14樓、24樓及34樓。

TOWER 第2A座

2-35/F Floor Plan

樓平面圖


FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE PHASE

期數的住宅物業的樓面平面圖



11



32-35/F Part Plan of Flat C
32-35樓C單位部分平面圖

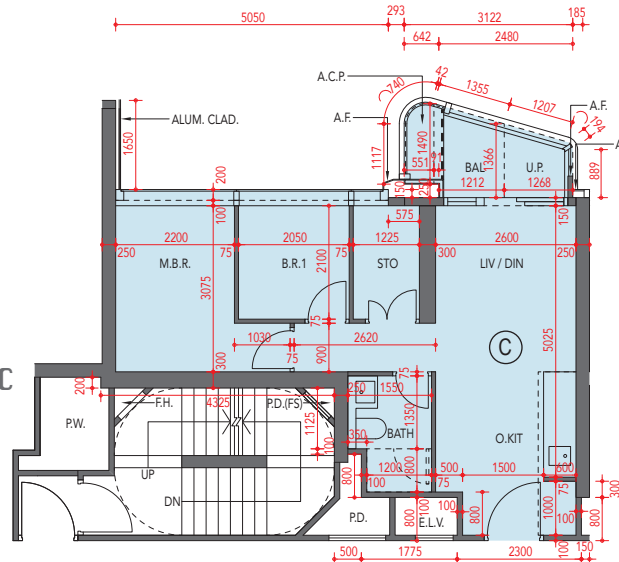

18/F Part Plan of Flat E
18樓E單位部分平面圖

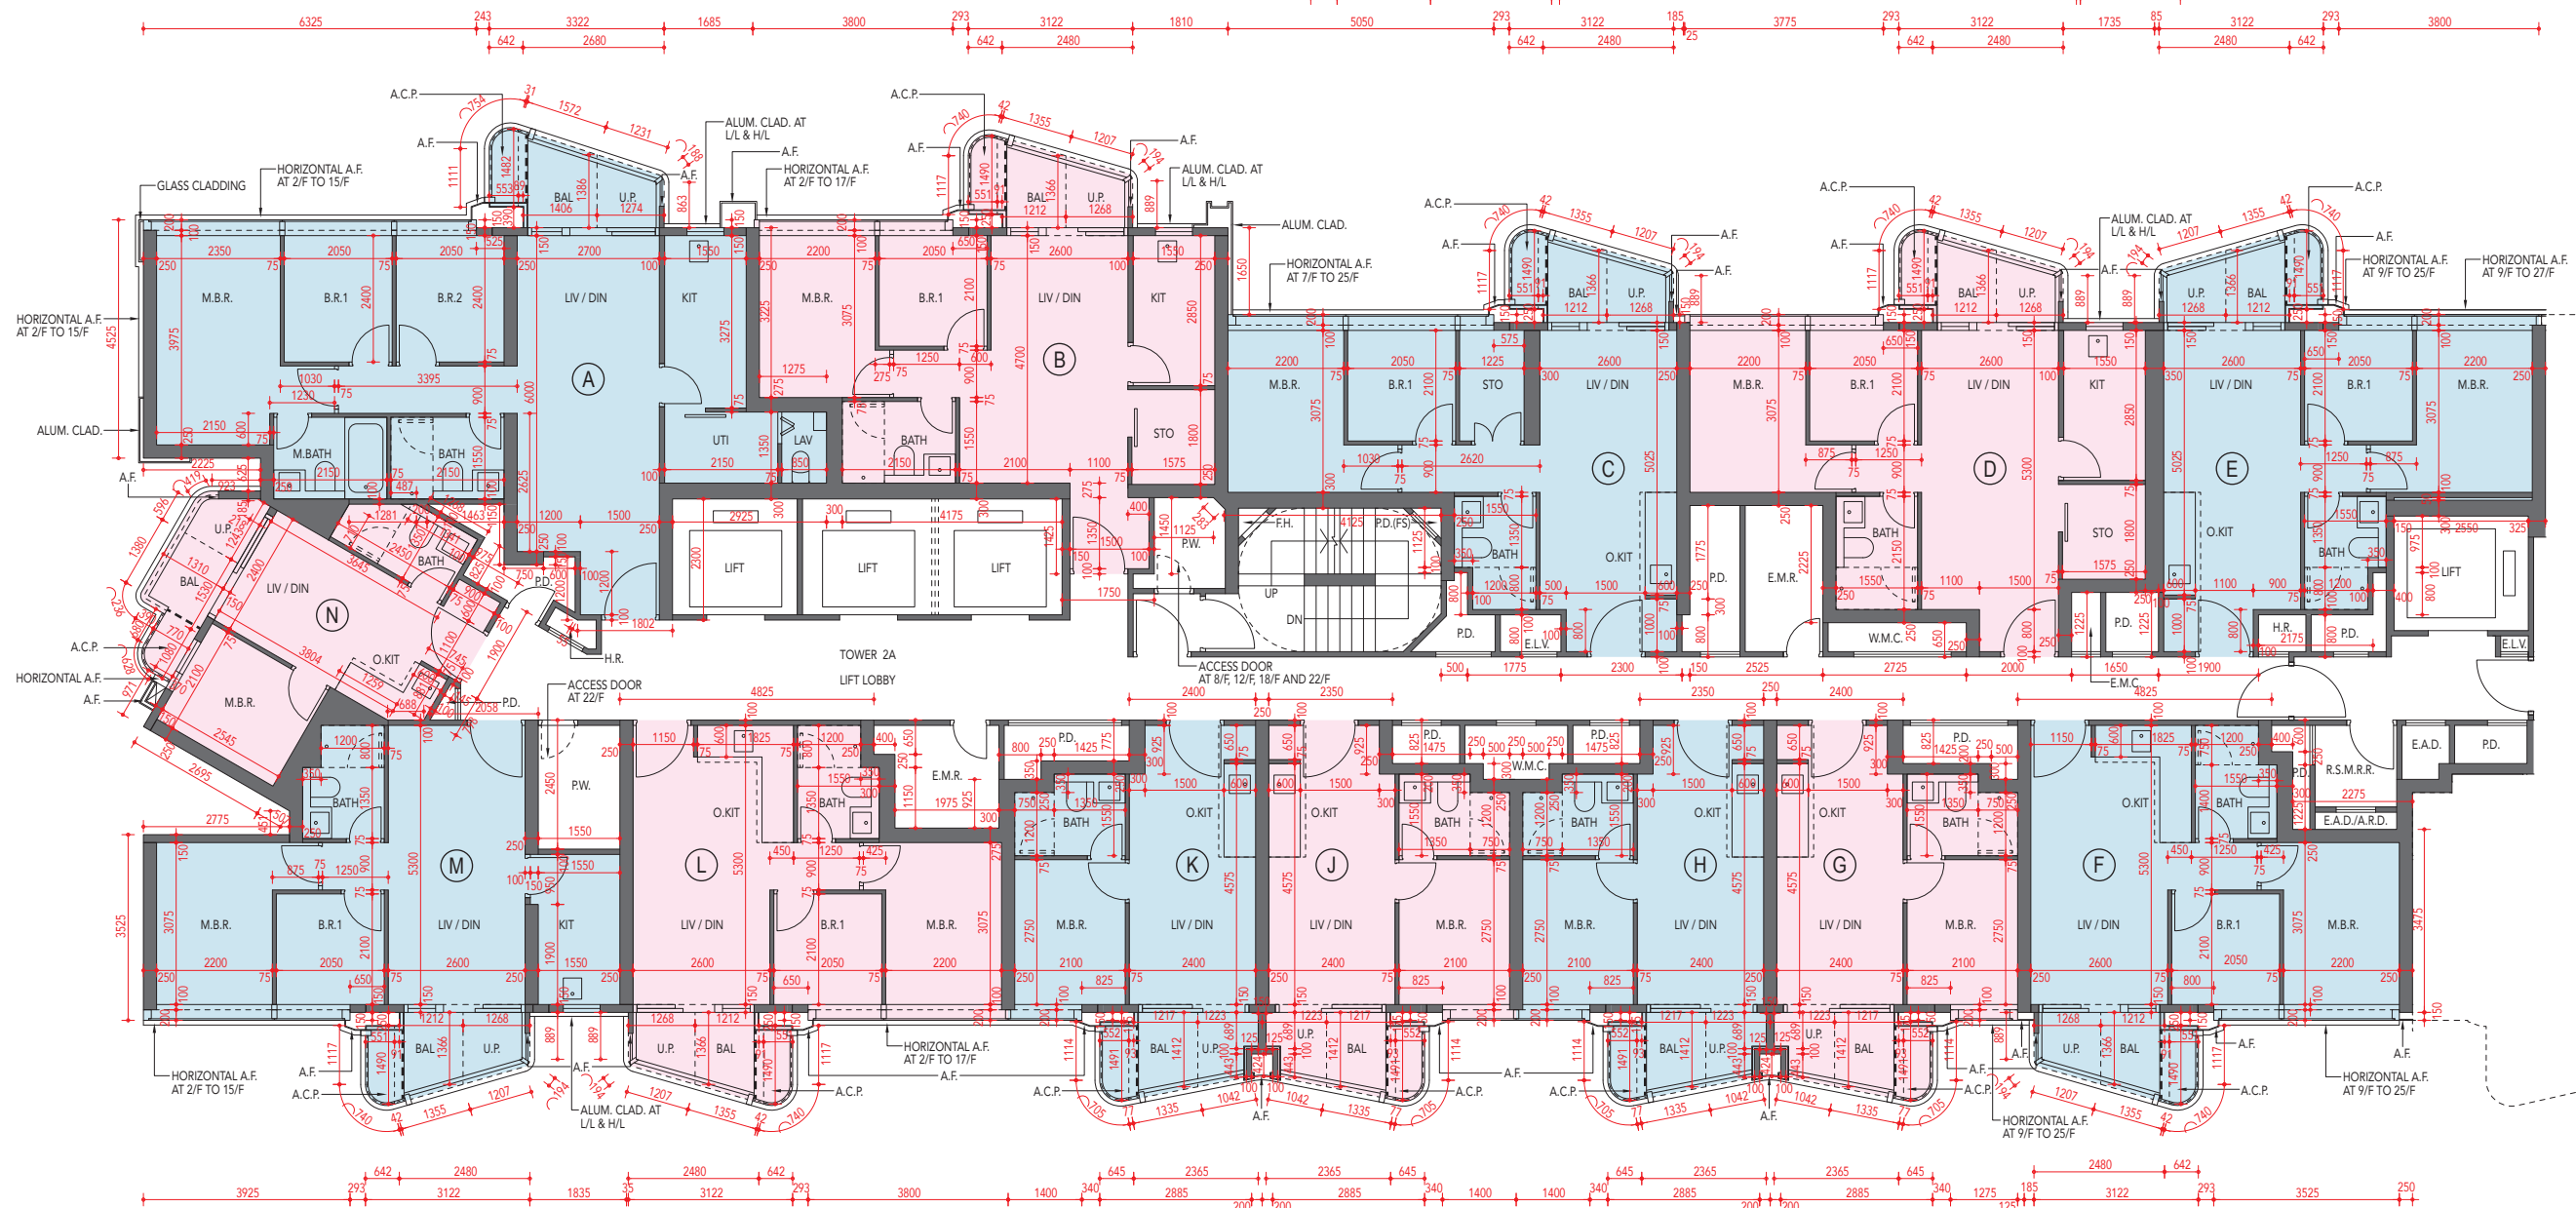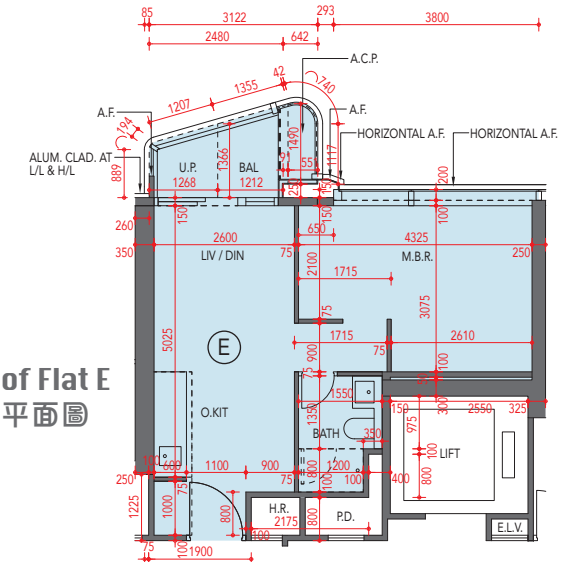

Scale 比例
0 5m/米

11

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE PHASE
期數的住宅物業的樓面平面圖



	Tower 座數	Floor 樓層	Flat 單位
			A
The thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板(不包括灰泥)的厚度(毫米)	Tower 2A 第2A座	R/F 天台	N/A
The floor-to-floor height (refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor) of each residential property (mm) 每個住宅物業的層與層之間的高度 (指該樓層之石屎地台面與上一層石屎地台面之高度距離)(毫米)			N/A


The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Note: This statement required in Section 10(2)(e) in Part 1 of Schedule 1 of the Residential Properties (First-hand Sales) Ordinance (Cap.621) is not applicable to the Phase)

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。(註：此乃根據《一手住宅物業銷售條例》(第621章)附表1第1部第10(2)(e)條所規定的陳述並不適用於期數)

Note:
4/F, 13/F, 14/F, 24/F and 34/F are omitted.

註：
不設4樓、13樓、14樓、24樓及34樓。

Roof Floor Plan
天台平面圖

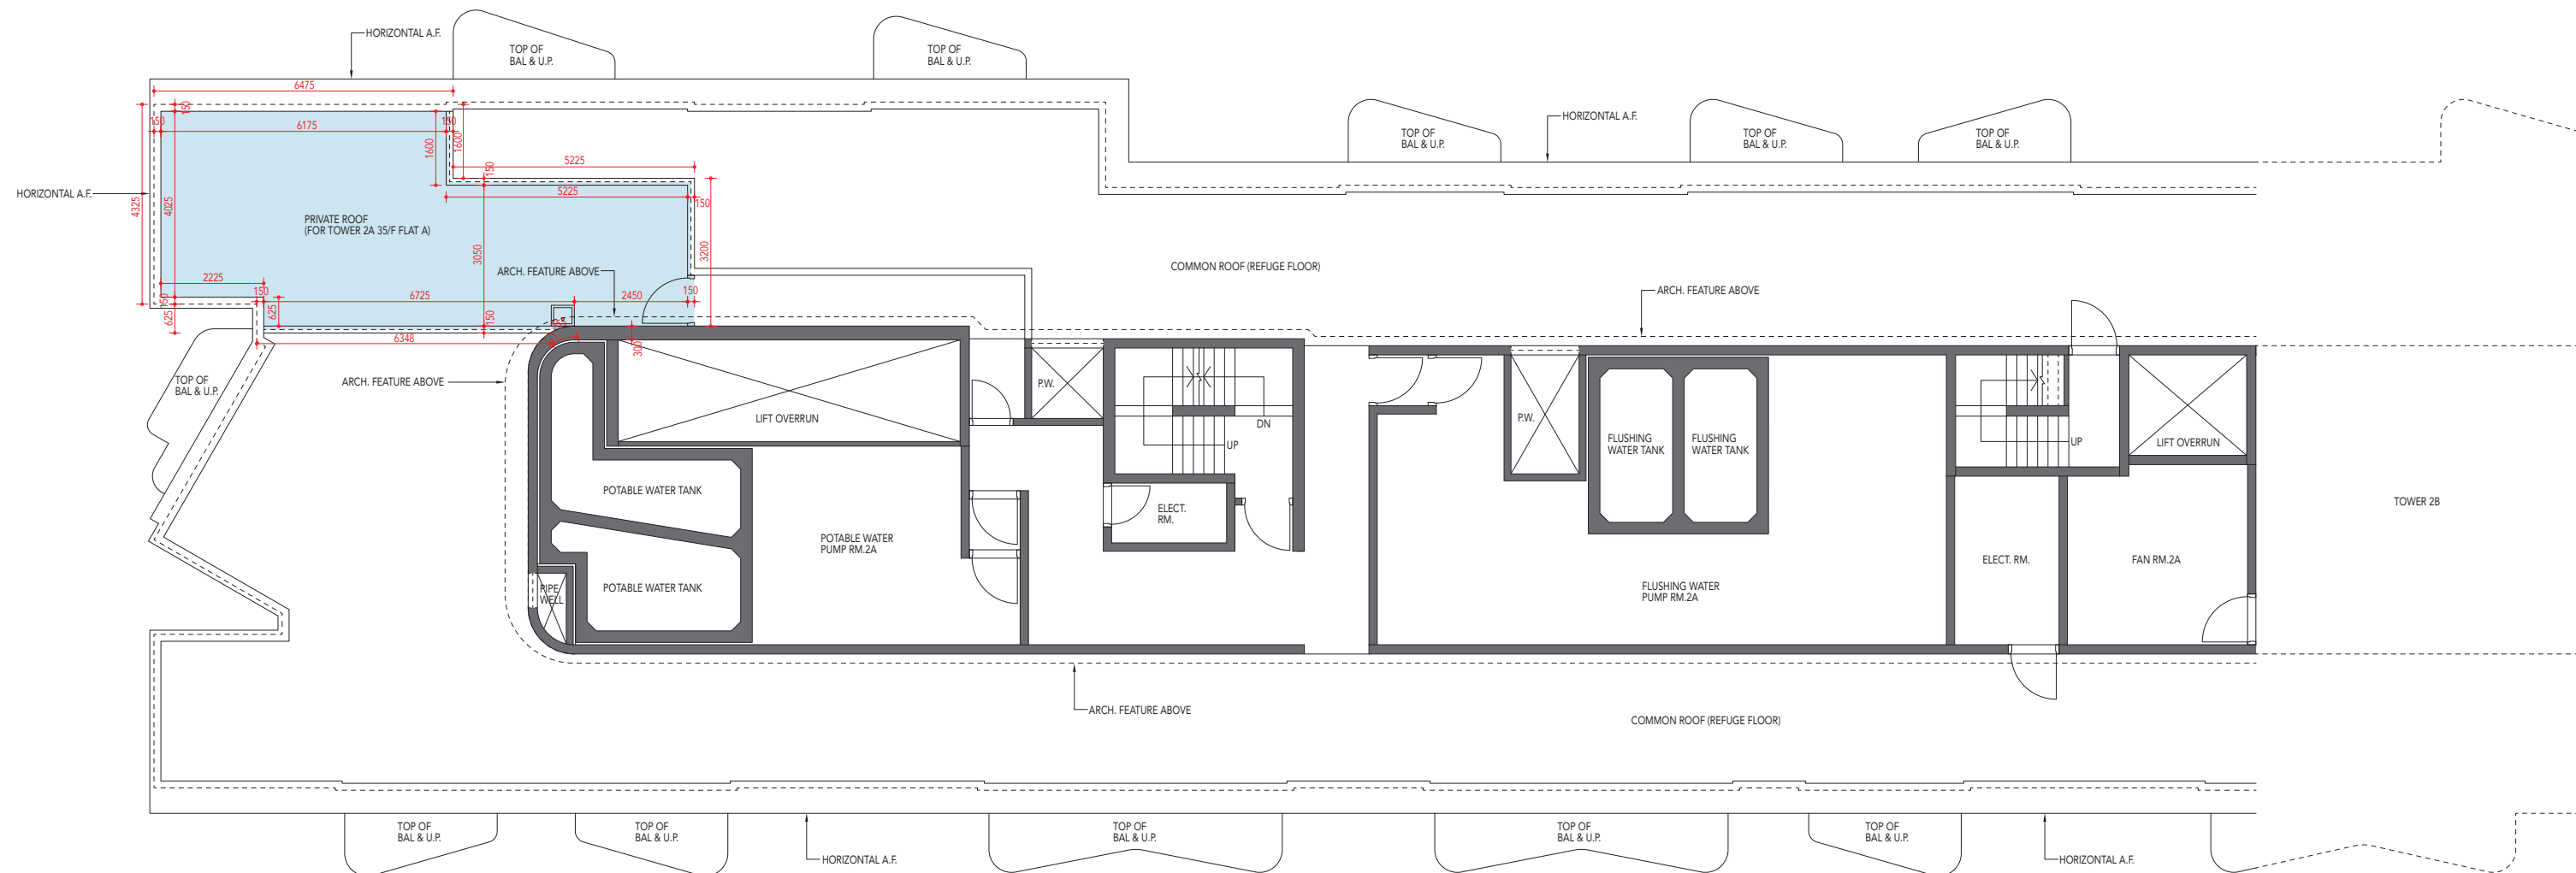

11

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE PHASE
期數的住宅物業的樓面平面圖



	Tower 座數	Floor 樓層							
			B	C	D	E	F	G	H
The thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板(不包括灰泥)的厚度(毫米)	Tower 2B 第2B座	1/F 1樓	125, 150	125, 150	125, 150, 175	125, 150	125, 150	125, 150	125, 150
The floor-to-floor height (refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor) of each residential property (mm) 每個住宅物業的層與層之間的高度 (指該樓層之石屎地台面與上一層石屎地台面之高度距離)(毫米)			3250*, 3350*, 3550*, 3600*	3150, 3250*, 3350*, 3550*, 3600*	3150, 3400*, 3450*, 3700*, 3750*	3400*, 3450*, 3700*, 3750*	3400*, 3450*, 3700*, 3750*	3400*, 3450*, 3700*, 3750*	3400*, 3650*, 3700*, 3750*

* Inclusive of the thickness of filling on sunken slab.

* 包括跌級樓板上之填充層厚度。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Note: This statement required in Section 10(2)(e) in Part 1 of Schedule 1 of the Residential Properties (First-hand Sales) Ordinance (Cap.621) is not applicable to the Phase)

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。(註：此乃根據《一手住宅物業銷售條例》(第621章)附表1第1部第10(2)(e)條所規定的陳述並不適用於期數)

Note:
4/F, 13/F, 14/F, 24/F and 34/F are omitted.

註：
不設4樓、13樓、14樓、24樓及34樓。

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE PHASE 期數的住宅物業的樓面平面圖

11

TOWER 第2B座

1/F Floor Plan 樓平面圖



Scale 比例

0 5m/米

11

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE PHASE
期數的住宅物業的樓面平面圖




	Tower 座數	Floor 樓層	Flat 單位								
			A	B	C	D	E	F	G	H	J
The thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板（不包括灰泥）的厚度（毫米）	Tower 2B 第2B座	2/F 2樓	125, 150, 175	125, 150	125, 150	125, 150, 175	125, 150	125, 150	125, 150	125, 150	125, 150
		3/F - 31/F 3樓至31樓	125, 150, 175	125, 150	125, 150	125, 150, 175	125, 150	125, 150	125, 150	125, 150	125, 150
		32/F - 33/F 32樓至33樓	125, 150, 175	125, 150	125, 150	125, 150, 175	125, 150	125, 150	125, 150	125, 150	125, 150
		35/F 35樓	125, 150, 175	125, 150, 175	125, 150, 175	125, 150	125, 150	125, 150	125, 150	125, 150, 175	125, 150, 175
2/F 2樓		3600*, 3650*, 3750*, 3850*, 3900*, 3950*	3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*	3600*, 3650*, 3900*, 3950*
3/F - 31/F 3樓至31樓		3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*
32/F - 33/F 32樓至33樓		3500, 3500*	3500, 3500*	3500, 3500*	3500, 3500*	3500, 3500*	3500, 3500*	3500, 3500*	3500, 3500*	3500, 3500*	3500, 3500*
35/F 35樓		4000, 4050*, 4100*, 4200*, 4300*, 4350*	4000, 4050*, 4250*, 4350*	4000, 4050*, 4250*, 4350*	4000, 4050*, 4300*, 4350*	4000, 4050*, 4300*, 4350*	4000, 4050*, 4300*, 4350*	4000, 4050*, 4300*, 4350*	4000, 4050*, 4300*, 4350*	4000, 4050*, 4100*, 4350*	4000, 4050*, 4300*, 4350*
The floor-to-floor height (refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor) of each residential property (mm) 每個住宅物業的層與層之間的高度 （指該樓層之石屎地台面與上一層石屎地台面之高度距離）（毫米）											

* Inclusive of the thickness of filling on sunken slab.
* 包括跌級樓板上之填充層厚度。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Note: This statement required in Section 10(2)(e) in Part 1 of Schedule 1 of the Residential Properties (First-hand Sales) Ordinance (Cap.621) is not applicable to the Phase)
因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（註：此乃根據《一手住宅物業銷售條例》（第621章）附表1第1部第10（2）（e）條所規定的陳述並不適用於期數）

Note:
4/F, 13/F, 14/F, 24/F and 34/F are omitted.

註：
不設4樓、13樓、14樓、24樓及34樓。

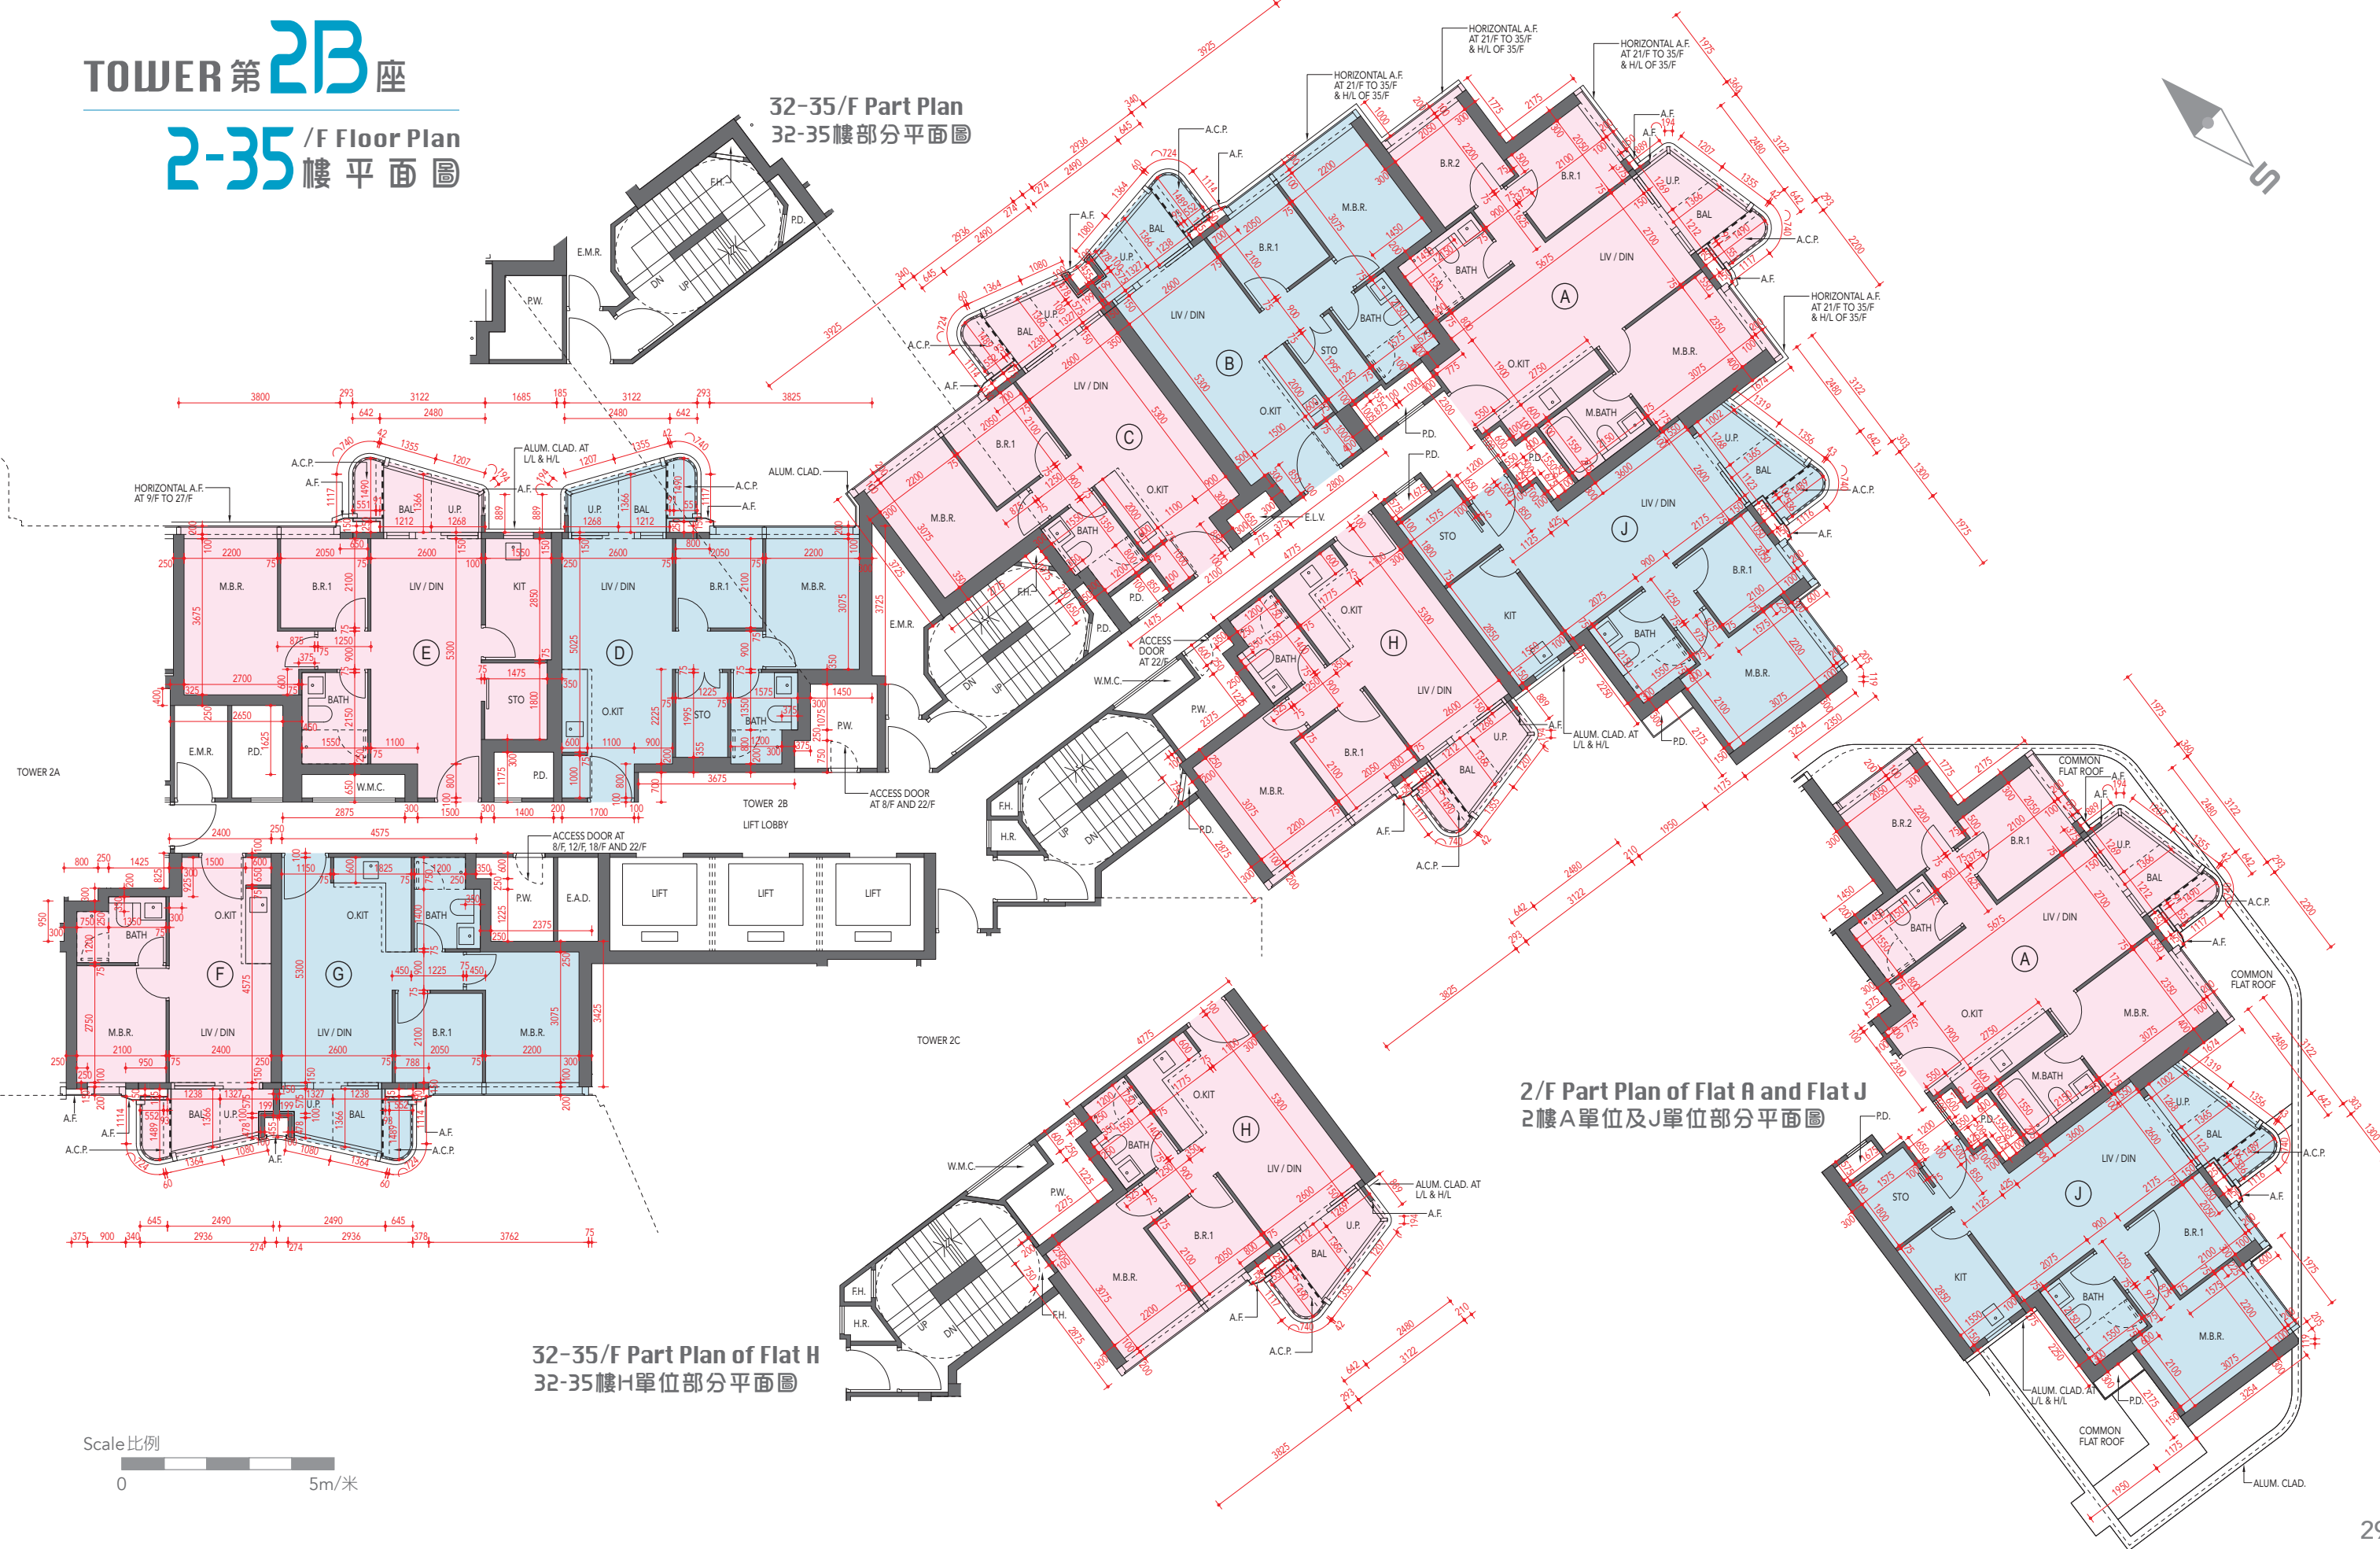

11

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE PHASE
期數的住宅物業的樓面平面圖



	Tower 座數	Floor 樓層	Flat 單位
			A
The thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板(不包括灰泥)的厚度(毫米)	Tower 2B 第2B座	R/F 天台	N/A
The floor-to-floor height (refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor) of each residential property (mm) 每個住宅物業的層與層之間的高度 (指該樓層之石屎地台面與上一層石屎地台面之高度距離)(毫米)			N/A

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Note: This statement required in Section 10(2)(e) in Part 1 of Schedule 1 of the Residential Properties (First-hand Sales) Ordinance (Cap.621) is not applicable to the Phase)

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。(註：此乃根據《一手住宅物業銷售條例》(第621章)附表1第1部第10(2)(e)條所規定的陳述並不適用於期數)

Note:
4/F, 13/F, 14/F, 24/F and 34/F are omitted.

註：
不設4樓、13樓、14樓、24樓及34樓。



Roof Floor Plan
天台平面圖

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE PHASE
期數的住宅物業的樓面平面圖

11



11

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE PHASE
 期數的住宅物業的樓面平面圖

	Tower 座數	Floor 樓層	Flat 單位										
			A	B	C	D	F	G	H	J	K	L	M
The thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板(不包括灰泥)的厚度(毫米)	Tower 2C 第2C座	1/F 1樓	125, 150	125, 150	125, 150, 175	125, 150	125, 150	125, 150	125, 150	125, 150	125, 150	125, 150	125, 150
The floor-to-floor height (refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor) of each residential property (mm) 每個住宅物業的層與層之間的高度 (指該樓層之石屎地台面與上一層石屎地台面之高度距離)(毫米)			3400*, 3450*, 3700*, 3750*	3400*, 3450*, 3700*, 3750*	3400*, 3450*, 3700*, 3750*	3400*, 3450*, 3700*, 3750*	3400*, 3450*, 3750*	3400*, 3450*, 3700*, 3750*	3400*, 3450*, 3700*, 3750*	3400*, 3450*, 3700*, 3750*	3400*, 3450*, 3700*, 3750*	3350*, 3400*, 3700*, 3750*	3400*, 3450*, 3700*, 3750*

* Inclusive of the thickness of filling on sunken slab.

* 包括跌級樓板上之填充層厚度。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Note: This statement required in Section 10(2)(e) in Part 1 of Schedule 1 of the Residential Properties (First-hand Sales) Ordinance (Cap.621) is not applicable to the Phase)

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。(註：此乃根據《一手住宅物業銷售條例》(第621章)附表1第1部第10(2)(e)條所規定的陳述並不適用於期數)

Note:

4/F, 13/F, 14/F, 24/F and 34/F are omitted.

註：



不設4樓、13樓、14樓、24樓及34樓。

TOWER 第2C座

1/F Floor Plan 樓平面圖

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE PHASE 期數的住宅物業的樓面平面圖

11

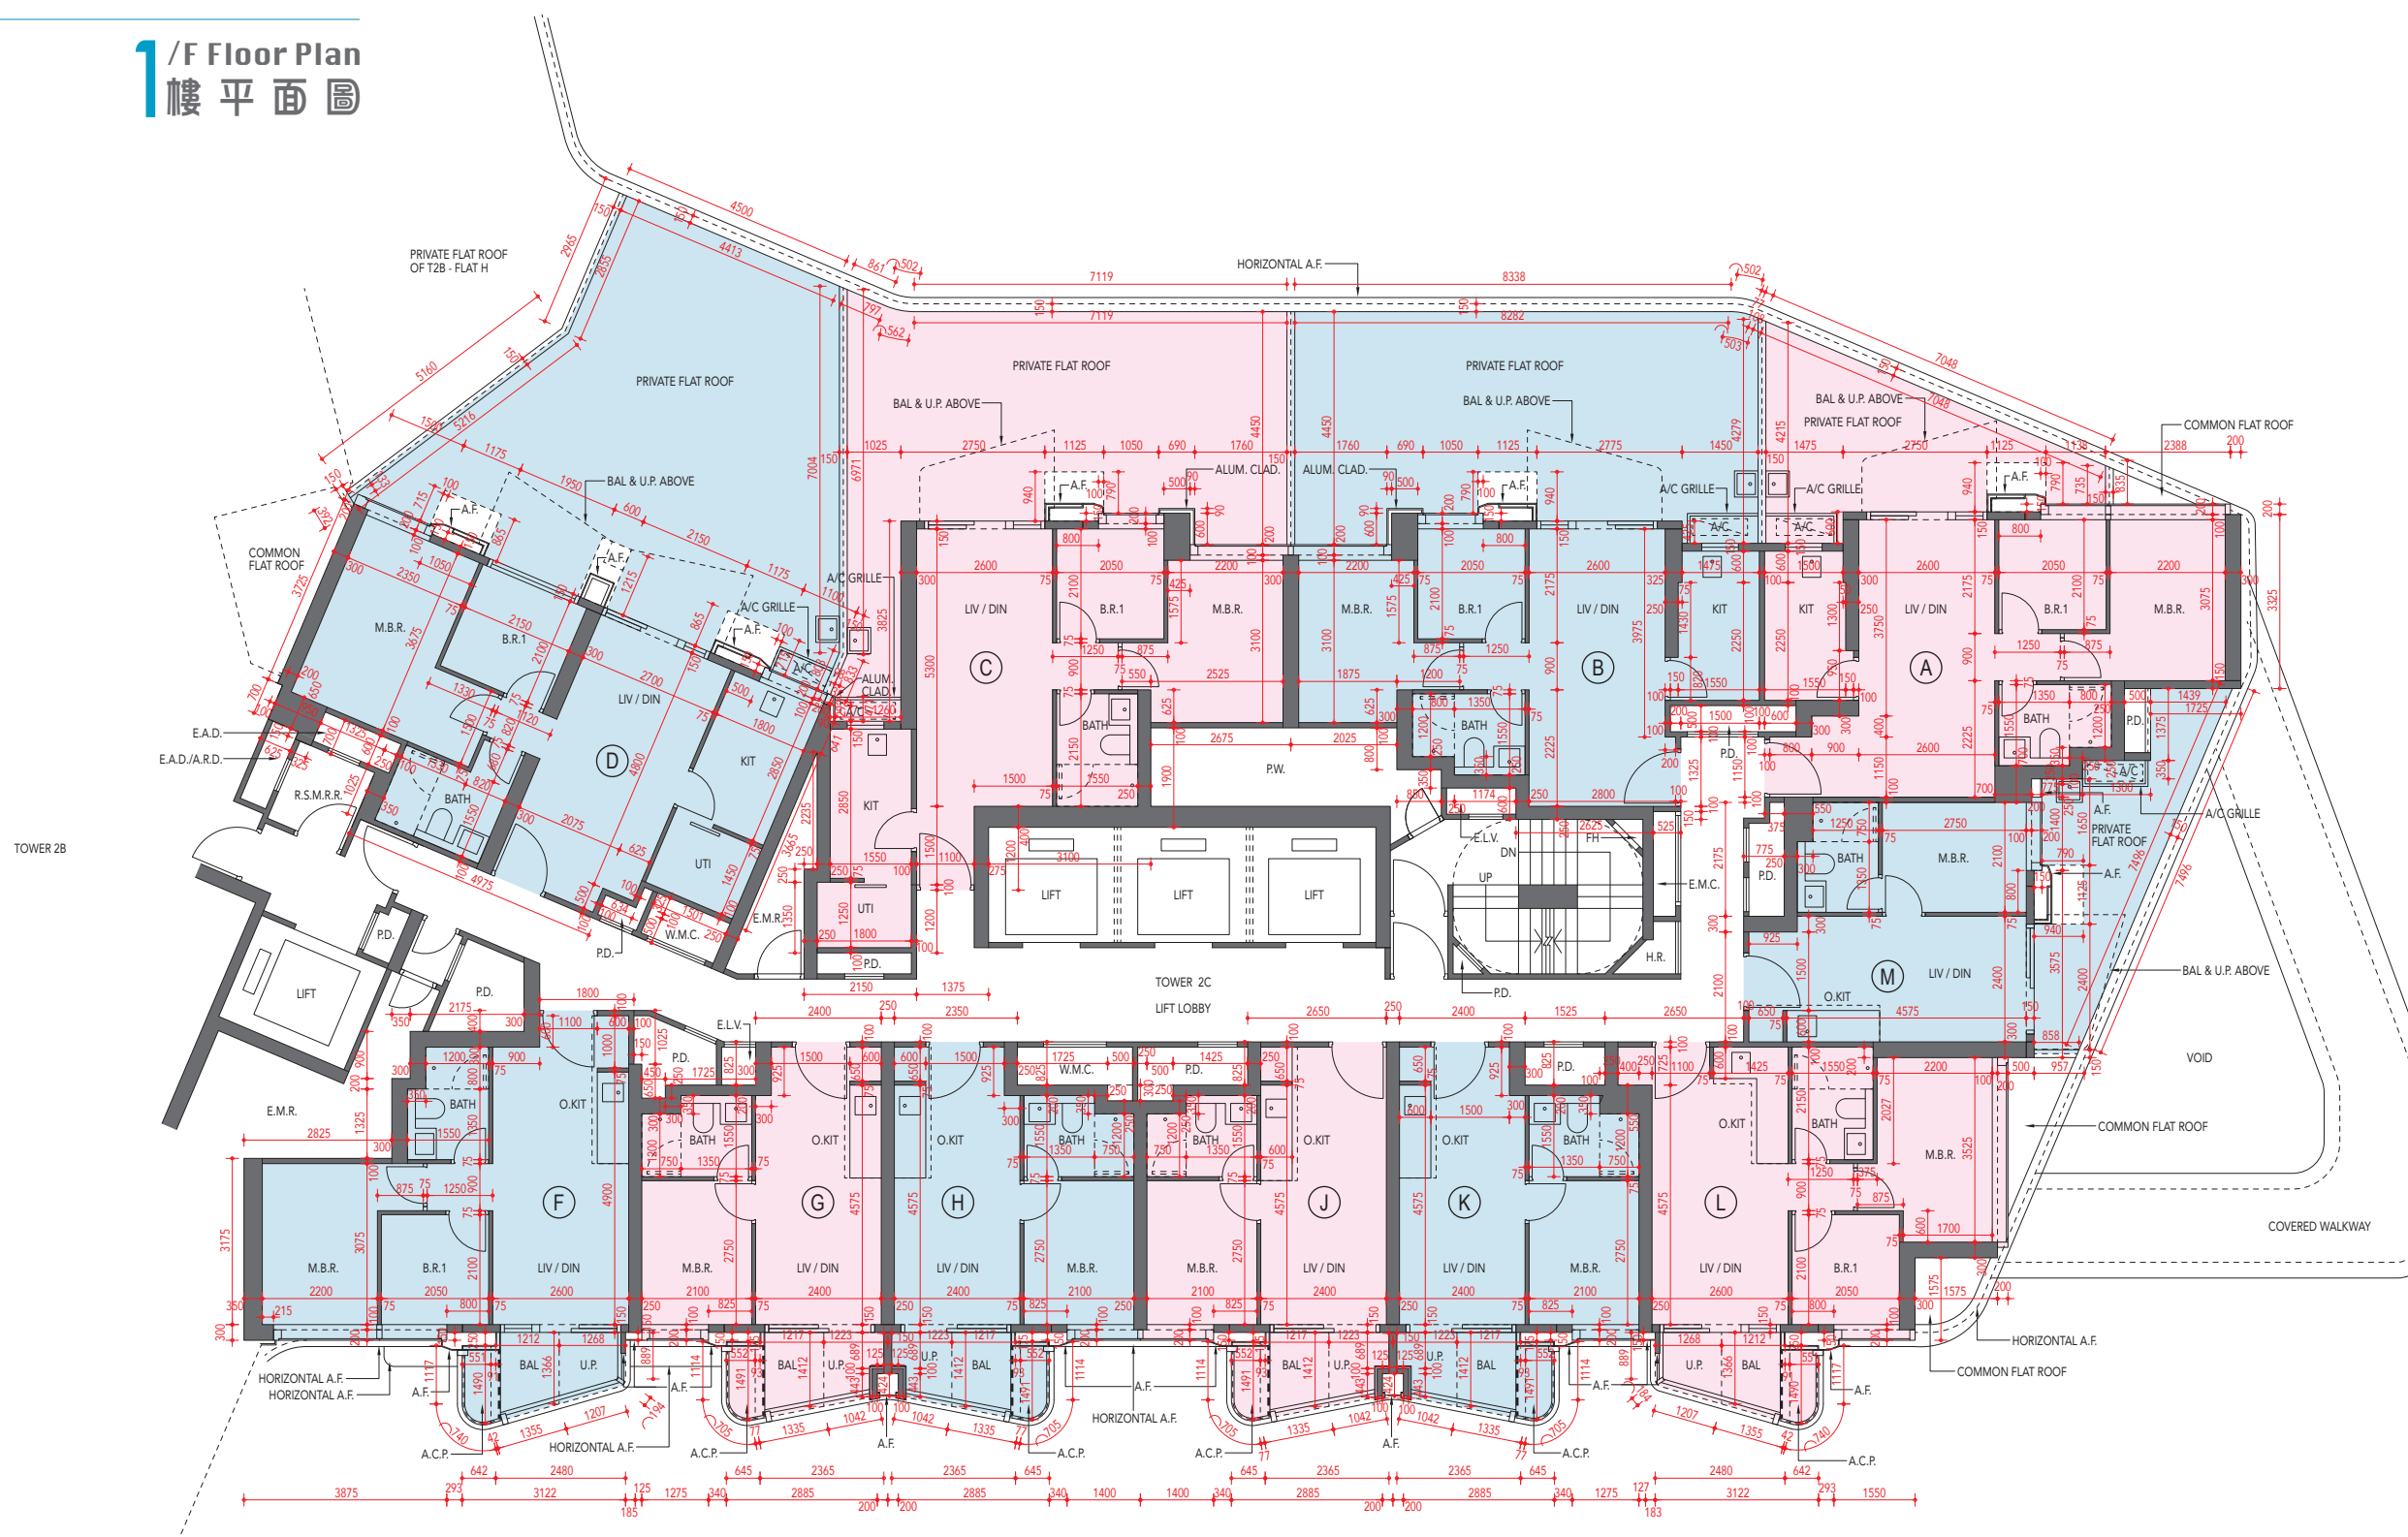

Scale比例



11

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE PHASE
期數的住宅物業的樓面平面圖



	Tower 座數	Floor 樓層	Flat 單位											
			A	B	C	D	E	F	G	H	J	K	L	M
The thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板（不包括灰泥） 的厚度（毫米）	Tower 2C 第2C座	2/F - 31/F 2樓至31樓	125, 150	125, 150	125, 150, 175	125, 150	125, 150	125, 150	125, 150	125, 150	125, 150	125, 150	125, 150	125, 150
		32/F - 33/F 32樓至33樓	125, 150	125, 150	125, 150, 175	125, 150	125, 150	125, 150	125, 150	125, 150	125, 150	125, 150	125, 150	125, 150
		35/F 35樓	125, 150	125, 150, 200	125, 150, 200	125, 150, 175	125, 175	125, 150	125, 150	125, 150	125, 150	125, 150	125, 150	125, 175
2/F - 31/F 2樓至31樓		3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*
32/F - 33/F 32樓至33樓		3500, 3500*	3500, 3500*	3500, 3500*	3500, 3500*	3500, 3500*	3500, 3500*	3500, 3500*	3500, 3500*	3500, 3500*	3500, 3500*	3500, 3500*	3500, 3500*	3500, 3500*
35/F 35樓		4000, 4050*, 4300*, 4350*	4000, 4050*, 4300*, 4350*	4000, 4050*, 4300*, 4350*	4000, 4050*, 4300*, 4350*	4000, 4050*, 4300*, 4350*	4000, 4300*, 4350*	4000, 4050*, 4300*, 4350*	4000, 4050*, 4300*, 4350*	4000, 4050*, 4300*, 4350*	4000, 4050*, 4300*, 4350*	4000, 4050*, 4300*, 4350*	4000, 4050*, 4350*, 4400*	4000, 4050*, 4300*, 4350*

* Inclusive of the thickness of filling on sunken slab.

* 包括跌級樓板上之填充層厚度。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Note: This statement required in Section 10(2)(e) in Part 1 of Schedule 1 of the Residential Properties (First-hand Sales) Ordinance (Cap.621) is not applicable to the Phase)

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。(註：此乃根據《一手住宅物業銷售條例》(第621章)附表1第1部第10(2)(e)條所規定的陳述並不適用於期數)


Note:
4/F, 13/F, 14/F, 24/F and 34/F are omitted.

註：
不設4樓、13樓、14樓、24樓及34樓。


TOWER 第2C座
2-35/F Floor Plan
樓平面圖

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE PHASE
期數的住宅物業的樓面平面圖


11

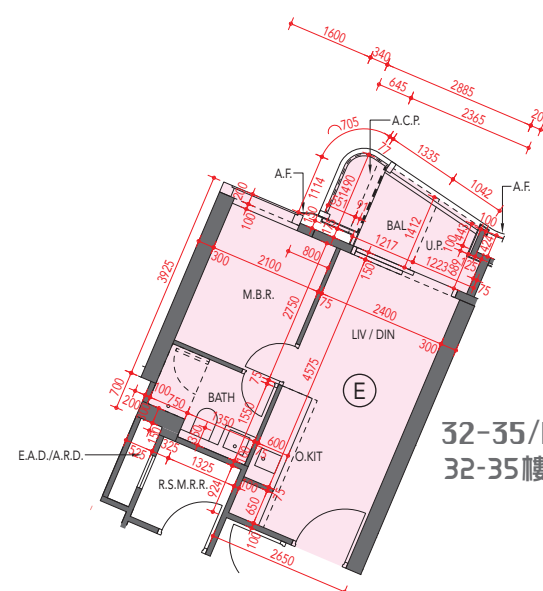

32-35/F Part Plan of Flat E
32-35樓E單位部分平面圖

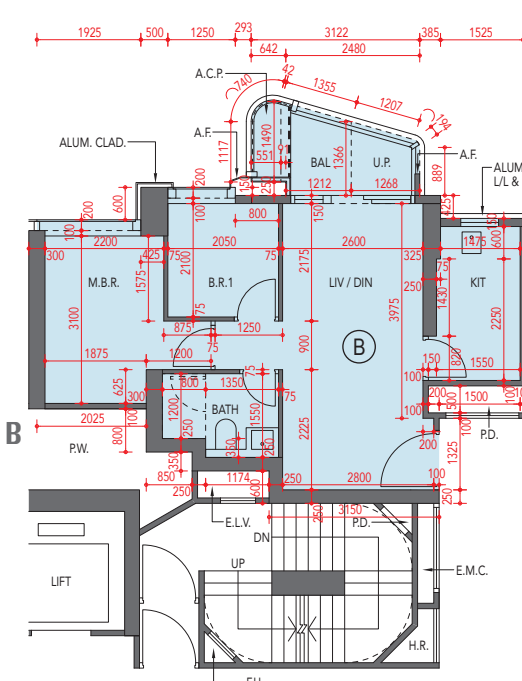

32-35/F Part Plan of Flat B
32-35樓B單位部分平面圖

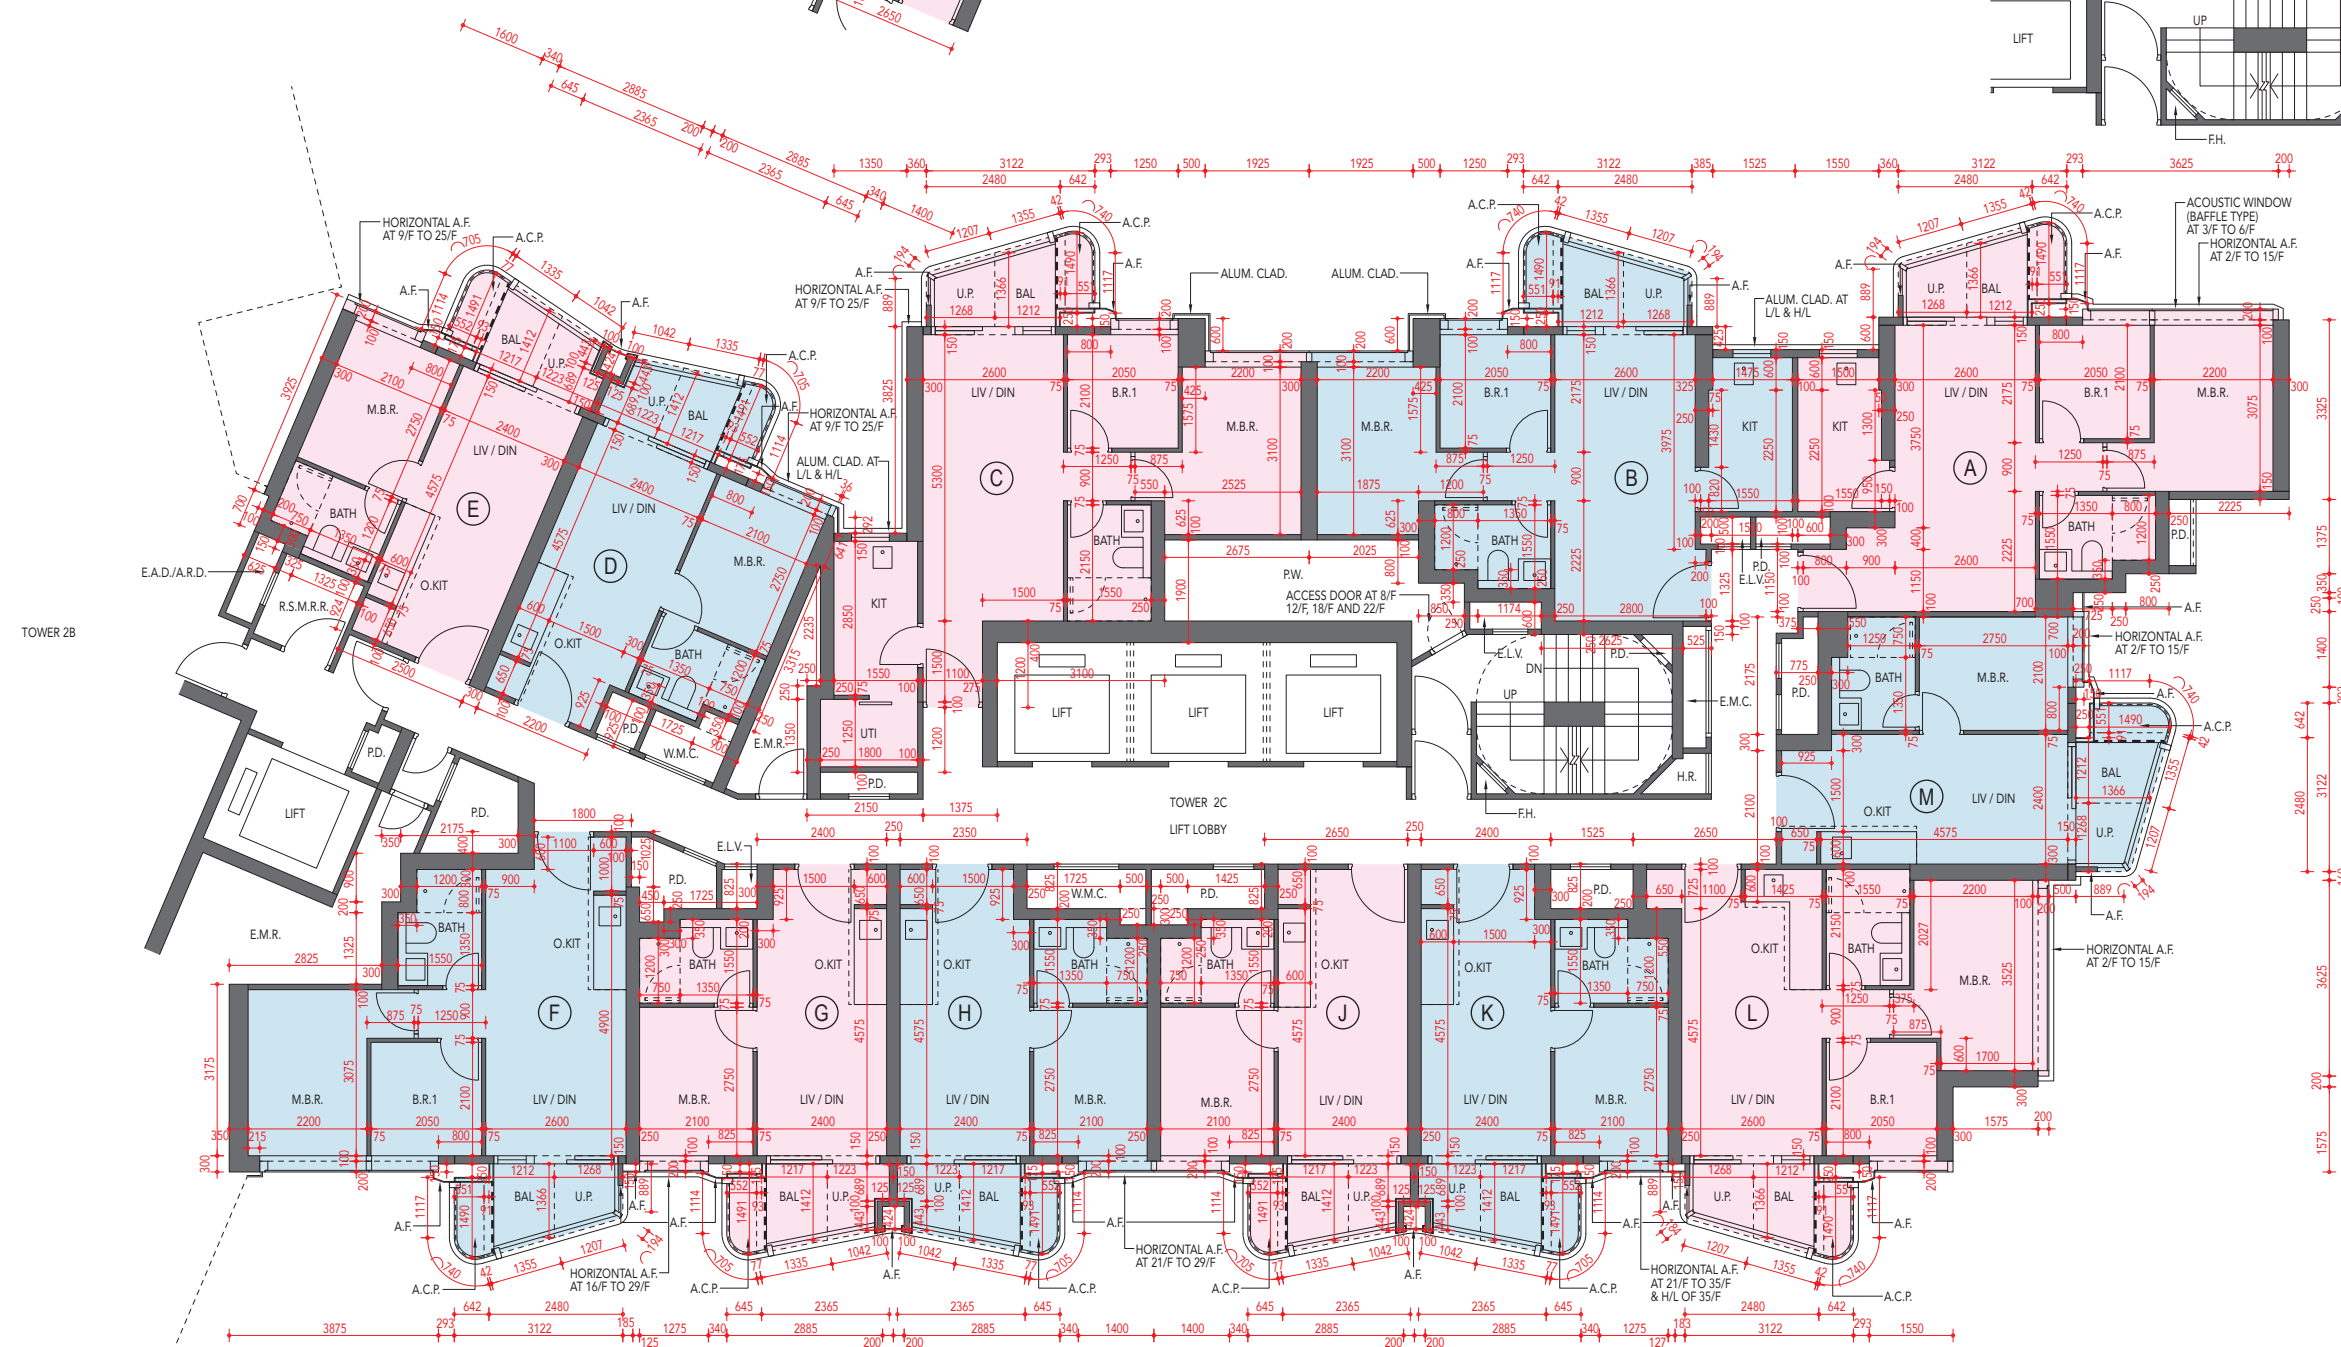

Scale 比例
0 5m/米